

DIVER COMMUNICATIONS SYSTEMS



• All our Diver Communication Systems use our latest Hi-Sense Dynamic Microphone Insert



LS 001 / 4SA - For KMB HELMETS 9, 10, 17, 18 and 28 Comprising of:

- One Microphone / 8.5 inch (210 mm) Cable
- One Earphone / 11.5 inch (290 mm) Cable
- One Earphone / 15 inch (380 mm) Cable



LS 002 / 4SA - For KMB HELMETS 9, 10, 18, 28 and 17 Simplex / Duplex Operation

Integrally moulded through HELMET Communications System comprising of:

- One Microphone / 8.5 inch (210 mm) Cable
- One Earphone / 11.5 inch (290 mm) Cable
- One Earphone / 15 inch (380 mm) Cable
- One 4 Pin Male Connector

For KMB 17 HELMETS: Earphone lengths are 13.5 inches (340 mm) & 9.5 inches (240 mm)
Microphone lengths are 8.5 inches (210 mm)



LS 003 - For KMB HELMETS 9, 10, 18, 28 and 17

Integrally moulded through HELMET Communications System comprising of:

- One fully moulded waterproof Microphone / 8.5 inch (210 mm) Cable
- One fully moulded waterproof Bone Conductor / 11.5 inch (290 mm) Cable
- One fully moulded waterproof Bone Conductor / 15 inch (380 mm) Cable
- One 4 Pin Male Connector

For KMB 17 HELMETS: Earphone lengths are 13.5 inches (340 mm) & 9.5 inches (240 mm).
Microphone lengths are 8.5 inches (210 mm)



LS 004

- Divers Hi-Sense Dynamic Microphone Insert for Oral Nasal Applications
- Can be used with all mainstream communication sets including our LS 001 / LS 002

LS 008


- Right Angled 4 Pin Connector
- Suitable for all mainstream diving helmets



LS 009 OS

LS 009 OS & LS 009 OS AGA Compatible Communications System comprising of:

- One fully moulded waterproof Bone Conductor complete with cover plate incorporating our Dynamic Hi-Sense microphone with EO or 2/4 pin connector
Nominal Cable lengths are 12 inches (30 cm)
- Compatible with various full face masks including AGA

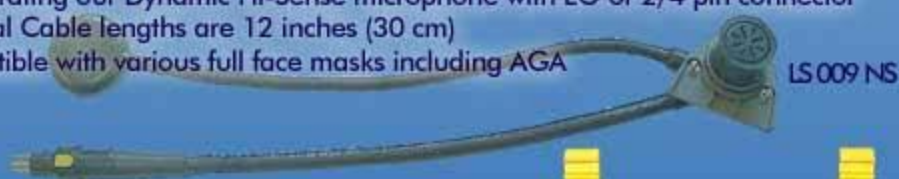

LS 009 NS

2-Diver Underwater Communications Systems



Model DR1202

- 2 / 4 Wire Systems
- Diver to Diver Communications
- Robust Circuit Board
- Power Supplies
- Internal 2 x 6 volt HP992
- Optional Re-Chargeable Battery Units
- Mains power operation: 115-230 volts 50/60 Hz
- Waterproof & airtight Pelicase Options



Model DR1202WPR
with internal Mains
power supply and
Rechargeable
Battery Unit

LINK SUBSEA LTD
UNIT 8
LIGHTBURN TRADING ESTATE
ULVERSTON
CUMBRIA
LA12 7NE
TEL: +44(0)1229 480606
FAX: +44(0)1229 480707
EMAIL: sales@linksubsea.com

LINK SUBSEA LTD
Underwater Connectors and Diver Communications Systems